


Bodywork Extraction Arm





The Nederman Bodywork extraction arm is based on the Original arm. It is specially designed for the extraction of fume, dust and vapours created during vehicle bodywork when welding, grinding or painting. The arm is available in a length of 5 m (16½ ft.). The product can be mounted in combination with different types of brackets.

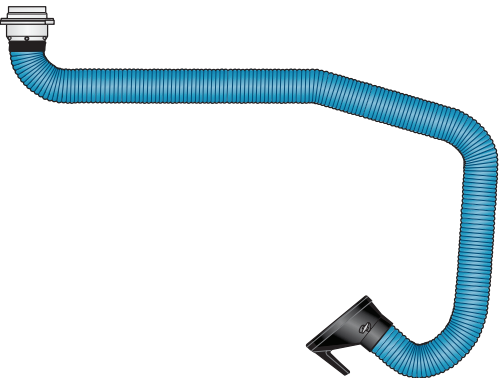

- A swivel allows the product to rotate 360°
- The arm is flexible in all directions and simple to position
- The product is equipped with a damper in the hood as standard
- Two 4-way friction joints makes it easy to position above or below vehicle body
- The 5m length gives easy access to all four corners of the vehicle

Pressure drop

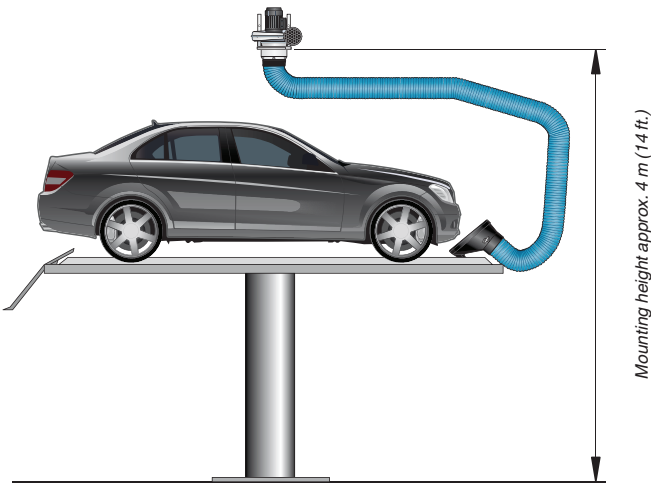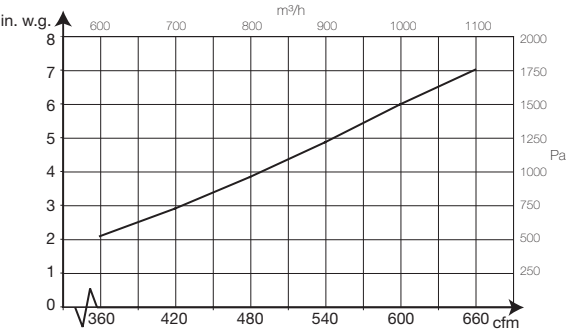

Description	Reach, m (ft.)	Airflow, m³/h (cfm)	Connection Ø, mm (in.)	Max. fume temperature, °C (°F)	Noise level at hood, dB(A)	Weight, kg (lb.)	Part no.
Bodywork Arm 5 m (16 ft.)	5 (16 1/2)	700-1000 (400-600)	150/160 (6/6 1/4)	70 (160)	65-70	18 (40)	10554935

Accessories: see end of chapter

Product availability may differ by country