

# Extraction Arm Original CR




Specially designed for working environments with fumes, vapours or non explosive dust. The arm has extended corrosion protection since all aluminium details including the arm system are anodized. Typical workplaces are food, pharmaceutical and chemical industries, and any other type of industry where an easily positioned corrosion resistant arm is required.




- Swivel allows the product to rotate 360°
- The arm is flexible in all directions and simple to position
- The product can be mounted in combination with different brackets, extension arms, on exhaust rails or on fixed or mobile filter equipment
- The product is equipped with a damper in the hood as standard
- The hood on all models can be tilted in all directions

## Pressure drop

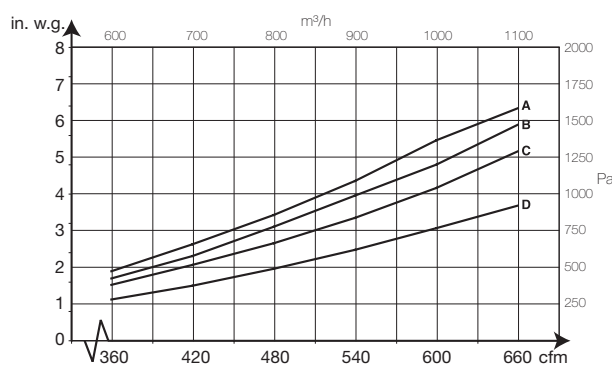

A= 4 m (14 ft.) horizontal, B= 4 m (14 ft.) vertical, C= 3 (10 ft.) m, D= 2 m (7 ft.)

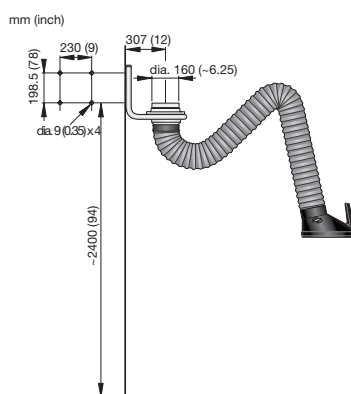

Description	Reach, m (ft.)	Airflow, m³/h (cfm)	Connection Ø, mm (in.)	Max. fume temperature, °C (°F)	Noise level at hood, dB(A)	Weight, kg (lb.)	Part no.
Original arm CR 2 m (7 ft.)	2 (7)	700-1000 (400-600)	150/160 (6/6 1/4)	70 (160)	63-75	11 (24)	10532535
Original arm CR 3 m (10 ft.)	3 (10)	700-1000 (400-600)	150/160 (6/6 1/4)	70 (160)	63-75	13 (29)	10532235
Original arm CR 4 m (14 ft.) vertical	4 (14)	700-1000 (400-600)	150/160 (6/6 1/4)	70 (160)	63-75	16 (35)	10532335
Original arm CR 4 m (14 ft.) horizontal	4 (14)	700-1000 (400-600)	150/160 (6/6 1/4)	70 (160)	63-75	16 (35)	10532435