

# Extraction Arm Original





It is specially designed for working environments with fumes, vapours or non explosive dust. Typical workplaces are the metal fabrication industry or other type of industries where extraction is needed. The applications can be welding, grinding, or other industrial processes where an easily positioned arm is required. The product is equipped with a damper in the hood as standard.



- Swivel allows the product to rotate 360°
- The arm is flexible in all directions and simple to position
- The product can be mounted in combination with different brackets, extension arms, on exhaust rails or on fixed or mobile filter equipment
- The hood on all models can be tilted in all directions

## Pressure drop

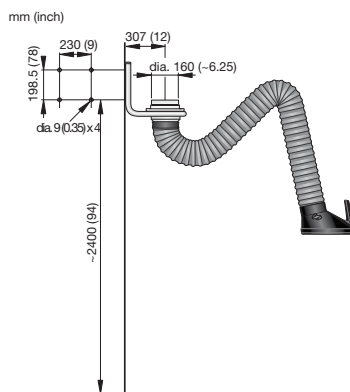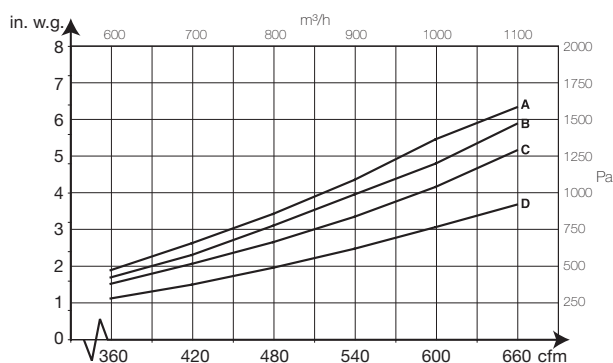

A= 4 m (14 ft.) horizontal, B= 4 m (14 ft.) vertical, C= 3 (10 ft.) m, D= 2 m (7 ft.)

Description	Reach, m (ft.)	Airflow, m³/h (cfm)	Connection Ø, mm (in.)	Max. fume temperature, °C (°F)	Noise level at hood, dB(A)	Weight, kg (lb.)	Part no.
Original arm 2 m (7 ft.)	2 (7)	700-1000 (400-600)	150/160 (6/6 1/4)	70 (160)	63-75	11 (24)	10554235
Original arm 3 m (10 ft.)	3 (10)	700-1000 (400-600)	150/160 (6/6 1/4)	70 (160)	63-75	13 (29)	10554335
Original arm 4 m (14 ft.) vertical	4 (14)	700-1000 (400-600)	150/160 (6/6 1/4)	70 (160)	63-75	16 (35)	10554435
Original arm 4 m (14 ft.) horizontal	4 (14)	700-1000 (400-600)	150/160 (6/6 1/4)	70 (160)	63-75	16 (35)	10554535

Kit consists of	Part no.
Original Arm 2 m (7 ft.) + N16, 3 phase, 208/230/460V fan + Wall bracket + Fan Manual Starter	10230610
Original Arm 2 m (7 ft.) + N16, 1 phase, 120/230V fan + Wall bracket + Fan Manual Starter	10230630
Original Arm 3 m (10 ft.) + N24, 1 phase, 120/230V fan + Wall bracket + Fan Manual Starter	10230660
Original Arm 4 m (14 ft.) vertical + N24, 1 phase, 120/230V fan + Wall bracket + Fan Manual Starter	10230690

Accessories: see end of chapter

Product availability may differ by country