

# Extraction Arm Standard




Nederman Extraction Arm Standard is specially designed for working environments with fumes, vapours or non explosive dust, where the demands for higher airflows and temperatures are moderate. Typical workplaces can be welding schools, different types of applications in light production. The applications can be welding, grinding, or other industrial processes where an easily positioned arm is required. The arm is available in two lengths, 2 and 3 m (7 and 10 ft.) and equipped with a high efficiency extraction hood.




- The arm is flexible in all directions and simple to position
- Designed for wall mounting and suspended by an integrated wall bracket/ 90° bend
- Allows rotation of 180°
- Can be equipped with a damper placed in the bend as an accessory
- The hood can be tilted in all directions

## Pressure drop

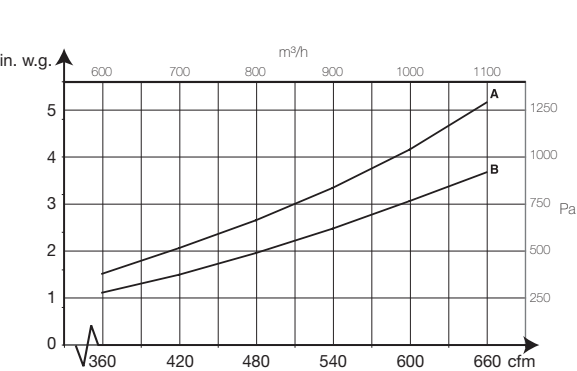

A: 3 m (10 ft.) B: 2 m (7 ft.)

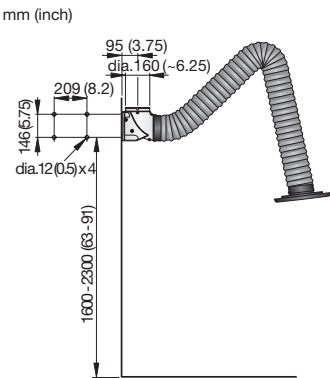

Description	Reach, m (ft.)	Airflow, m³/h (cfm)	Connection Ø, mm (in.)	Max. fume temperature, °C (°F)	Noise level at hood, dB(A)	Weight, kg (lb.)	Part no.
Standard arm 2 m (7 ft.)	2 (7)	600-900 (350-525)	160 (6 1/4)	70 (160)	67	11 (24)	10500238
Standard arm 3 m (10 ft.)	3 (10)	600-900 (350-525)	160 (6 1/4)	70 (160)	67	13 (29)	10500338